


PK 11001-K

High Performance

PALFINGER CRANE



Efficient and profitable


The PK 11001 K is the perfect crane for a diversity of uses. The balanced ratio of dead weight to lifting power combined with a wide variety of features and attachments make this crane a leader in its metre tonne class.

Ideal ratio of lifting power to dead weight


KP-HPK11001KL2+E
E 06/08, K 06/08, D 05/08

PK 11001 K High Performance

STD

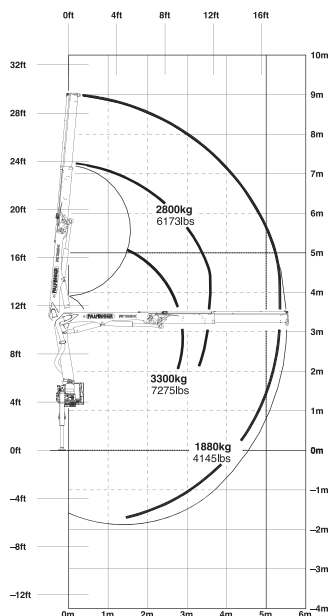

A

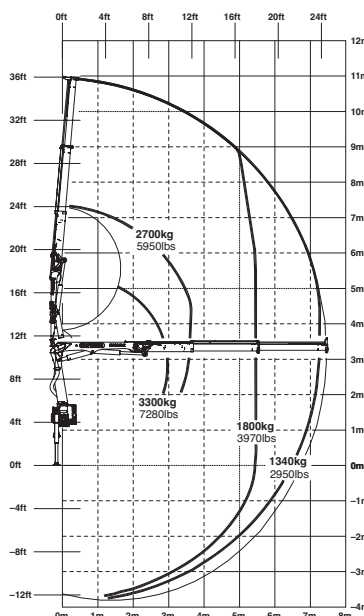

Technical Specifications (EN 12999 H1-B3)

Max. lifting moment	10.1 mt/99.1 kNm	73080 ft.lbs	Stabilizer spread	std. 3.2 m/10' 6"	max. 5.6 m/18' 4"
Max. lifting capacity	3300 kg/32.4 kN	7280 lbs	Fitting space required (std.)	0.68 m	2' 3"
Max. hydraulic outreach	7.5 m	24' 7"	Width folded	2.4 m	7' 10"
Max. manual outreach	11.5 m	37' 9"	Max. operating pressure	320 bar	4640 psi
Slewing angle	400 °		Recommended pump capacity	from 30 l/min to 45 l/min	7.9 US gal./min to 11.9 US gal./min
Slewing torque	1.3 mt/12.7 kNm	9400 ft.lbs	Dead weight (std.)	1072 kg	2360 lbs

