

PK 13001 K




MORE PAYLOAD AND LESS OPERATING COSTS AS A RESULT OF INTELLIGENT LIGHTWEIGHT DESIGN




PK 13001 K HIGH PERFORMANCE



A

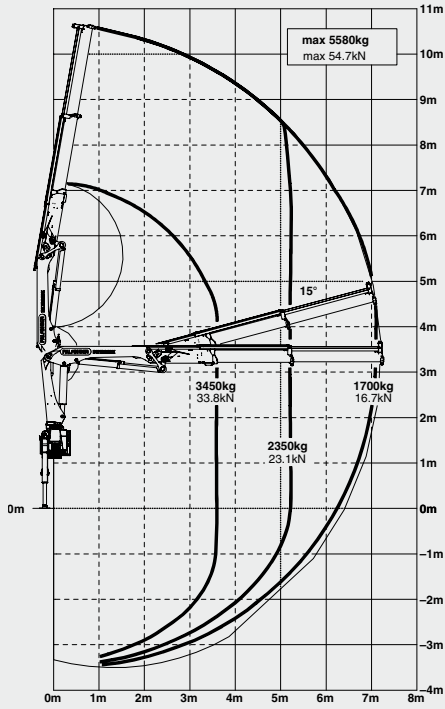


B

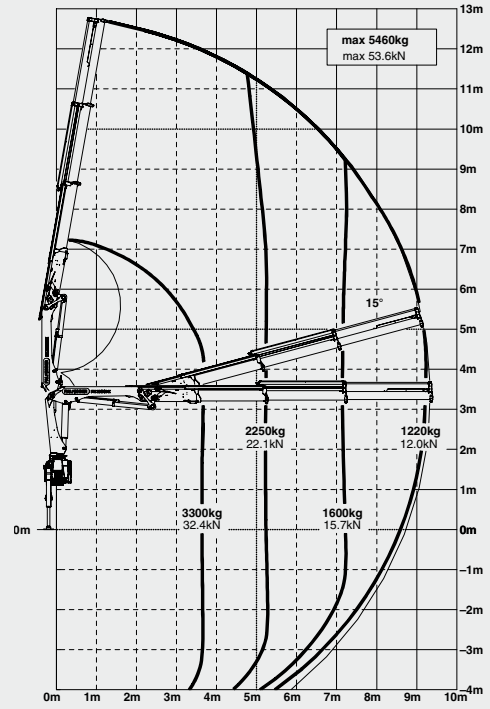

DIMENSIONS

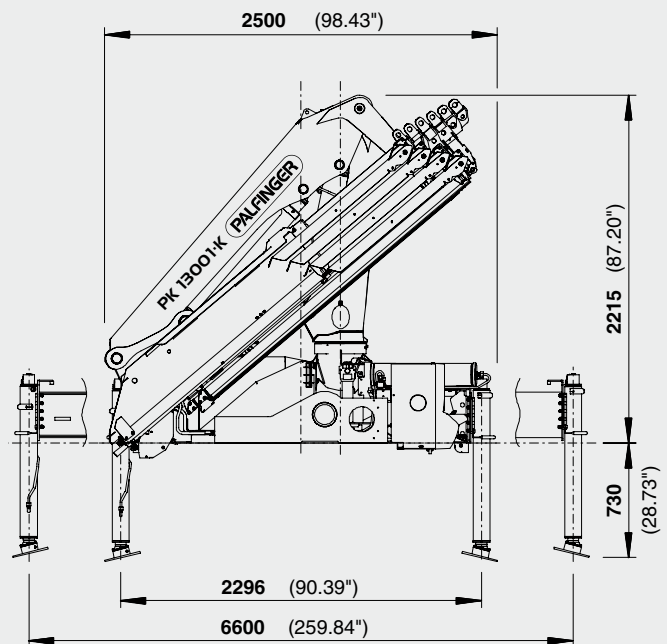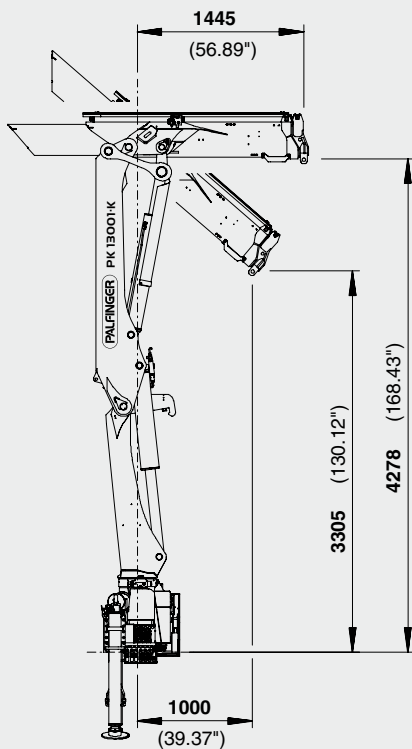

C

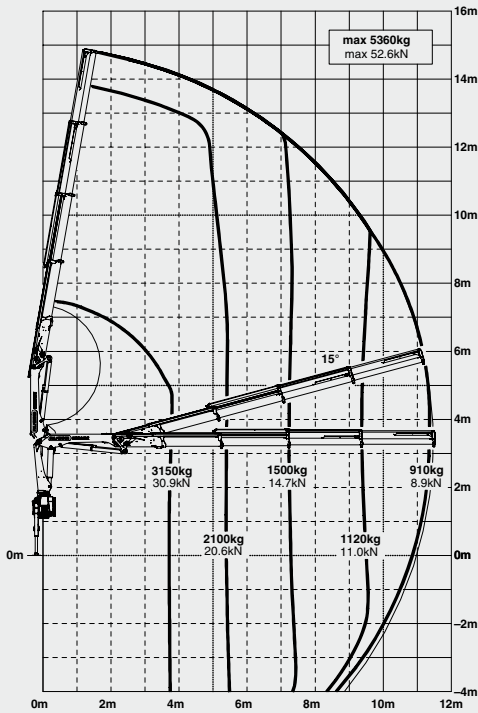


- High value retention due to KTL coating
- Additional applications due to Single Link Plus
- Maximum utilisation of the working range due to HPSC
- Higher payloads due to intelligent lightweight design
- Shorter load cycle times due to High Speed Extension



TECHNICAL SPECIFICATIONS (EN 12999 HC1 HD4/B3)

Max. lifting moment	12.8 mt / 125.6 kNm	92570 ft.lbs
Max. lifting capacity	5700 kg / 55.9 kN	12570 lbs
Max. hydraulic outreach	11.5 m	37' 9"
Max. manual outreach	15.5 m	50' 1"
Slewing angle	420°	
Slewing torque	1.6 mt / 15.7 kNm	11580 ft.lbs
Stabiliser spread (std./max.)	5.0 m / 6.6 m	16' 5" / 21' 8"
Fitting space required (std.)	0.71 m	2' 4"
Width folded	2.5 m	8' 2"
Max. operating pressure	320 bar	4640 psi
Recommended pump capacity	from 35 l/min to 50 l/min	9.2 US gal./min 13.2 US gal./min
Dead weight (std.)	1477 kg	3260 lbs

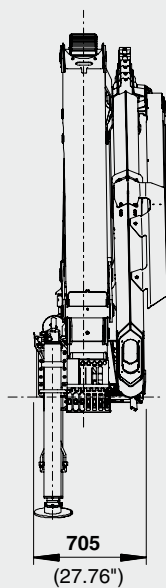

* Optional features / country-specific equipment

LIFETIME EXCELLENCE

PALFINGER LOADER CRANES ARE CONVINCING DUE TO THEIR SUPERIOR LIFE-CYCLE PERFORMANCE. THEY ARE THE MOST ECONOMICAL AND ALSO THE MOST RELIABLE OVER THE ENTIRE PRODUCT LIFE. FROM SOLUTION FINDING TO RESALE.

**BETTER
SOLUTIONS**

**BETTER
EFFICIENCY**

**BETTER
ERGONOMICS**

**HIGHER VALUE
RETENTION**



**HIGHER
AVAILABILITY**

**HIGHER
SERVICEABILITY**

**BETTER
ECOLOGY**

**MORE
RELIABILITY**

For further information please visit: www.palfinger.com/thebrand