

PK 30002-K

High Performance


PALFINGER CRANE



Compact crane efficiency with Power Link Plus

KP-HPK30002KL1+E
E 10/09, K 04/10, D 04/10

PK 30002 K High Performance

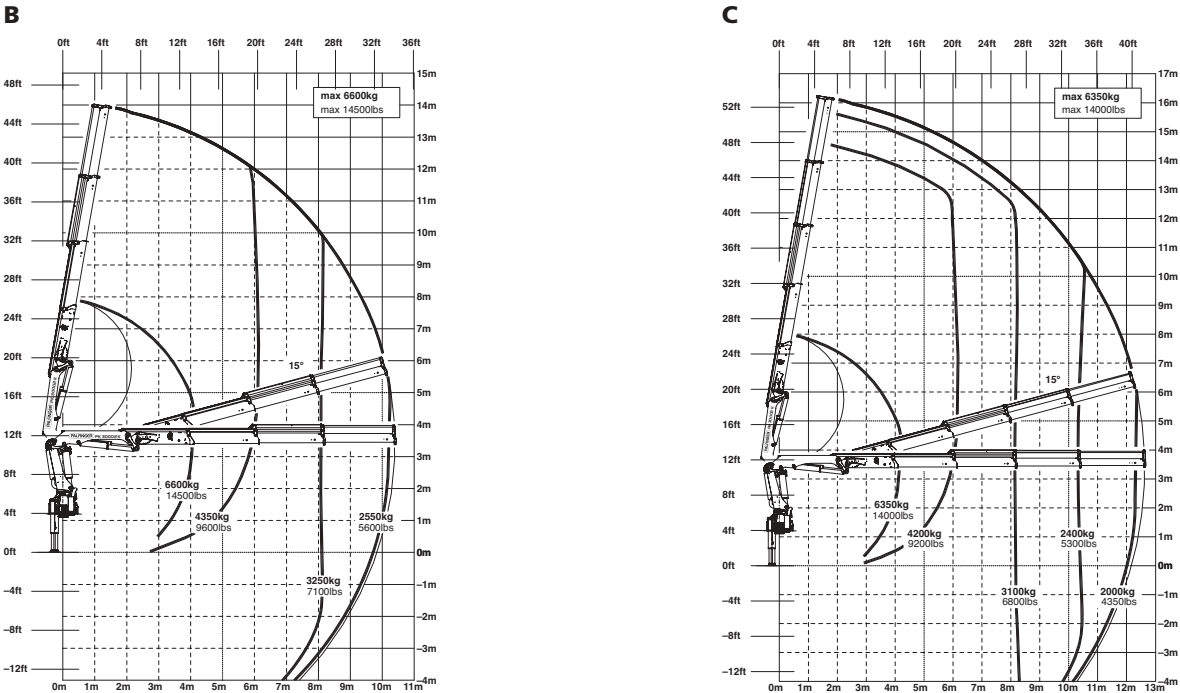

Technical Specifications (EN 12999 HC1 HD4/B3)

Max. lifting moment	28.2 mt/277.0 kNm	204290 ft.lbs	Stabilizer spread	std. 5.6 m/18' 4"	max. 7.4 m/24' 3"
Max. lifting capacity	7000 kg/68.7 kN	15430 lbs	Fitting space required (std.)	0.92 m	3' 0"
Max. hydraulic outreach	12.6 m	41' 4"	Width folded	2.53 m	8' 3"
Max. manual outreach	17.0 m	55' 9"	Max. operating pressure	320 bar	4640 psi
Slewing angle	400 °		Recommended pump capacity	from 55 l/min to 80 l/min	14.5 US gal./min to 21.1 US gal./min
Slewing torque	3.2 mt/31.4 kNm	23130 ft.lbs	Dead weight (std.)	2790 kg	6150 lbs

